

MF600T05 Macerating Toilet System



FEATURES :

- 30 feet Max. Vertical Discharge
- 260 feet Max. Horizontal Discharge
- 3 Versatile Water Inlets
- 1¹/₂" Dual Use Vent Pipe
- Sewage Outlet With Built-in Check Valve

SPECIFICATIONS:

- **Dimension:** 17 ⁵/₁₆"L * 11 ⁷/₁₆"H * 7 ¹/₁₆"W
- Power Factor: 0.85
- Insulation Class: 155(F)
- Speed: 3450 RPM
- Power Consumption: 600 W
- Supply Voltage: 110V-60Hz
- Enclosure Class: IP 55
- Max. Flow: 130L/min
- Start Level: 65mm
- Stop Level: 35mm
- Cable Length: 39 3/8"

TWO-PIECE TOILET

FEATURES:

- Rear Discharge Two-Piece Toilet
- Chair-Height (16 1/2")
- Tornado Rimless Flushing
- 18 ½" Comfortable Elongated Bowl
- Left-Handed Flush Lever

SPECIFICATIONS:

- **N.W:** 100.4 LB
- **Dimension:** 27 ³/₈"L* 29 ¹/₂"H * 15 ³/₄"W
- Trap Type: P-trap
- Flush Type: Rimless Flush
- Flush Rate: 1.28GPF
- Waste Outlet: Wall
- Seat Shape: Elongated
- Installation Type: Floor Mounted
- Quality Assurance: Limited 2-Year

(+1) 626-670-9903





PACKAGE INCLUDED:



Toilet Bowl



Floor Mounting Kit



Extension Pipes



Water Tank (Fill Valve And Flapper Kit Pre-installed)



Tank-To-Bowl Gasket



Flush Lever



Toilet Seat



Macerator Pump



Adapter



Seat Mounting Kit




Pump Fittings

(+1) 626-670-9903



	Pump	Bowl	Water Tank	Toilet Seat	Extension Pipes
Material	Stainless Steel, Polypropylene	Ceramic	Ceramic	Ceramic	Polypropylene
Color	White	White	White	White	White
Weight	14.3 LB	61.1 LB	31.3 LB	4.2 LB	2.3 LB

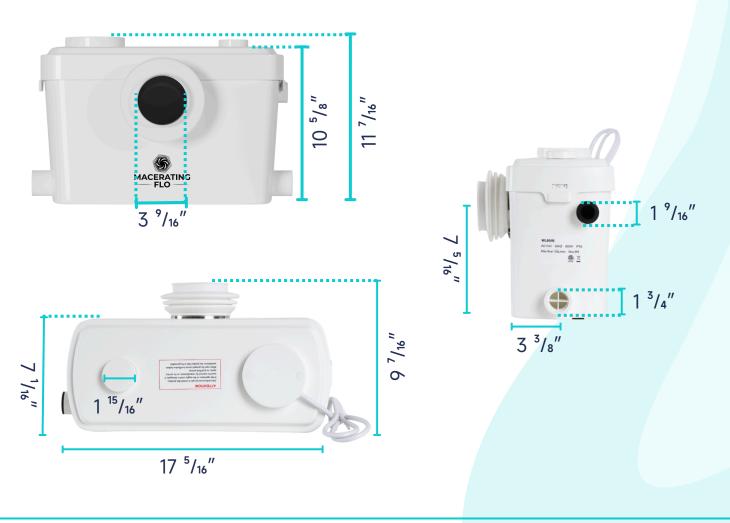


(+1) 626-670-9903





(+1) 626-670-9903



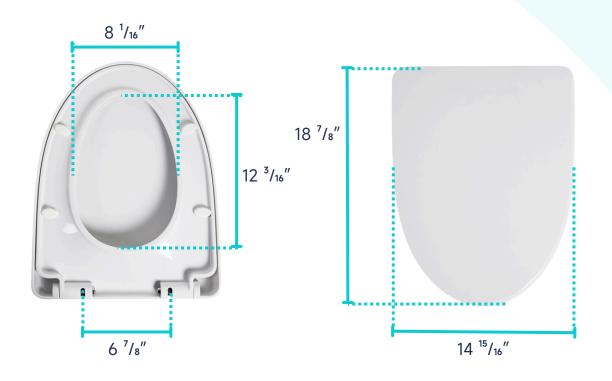


ABOUT WATER INLETS:




(+1) 626-670-9903



PUMP FITTINGS:

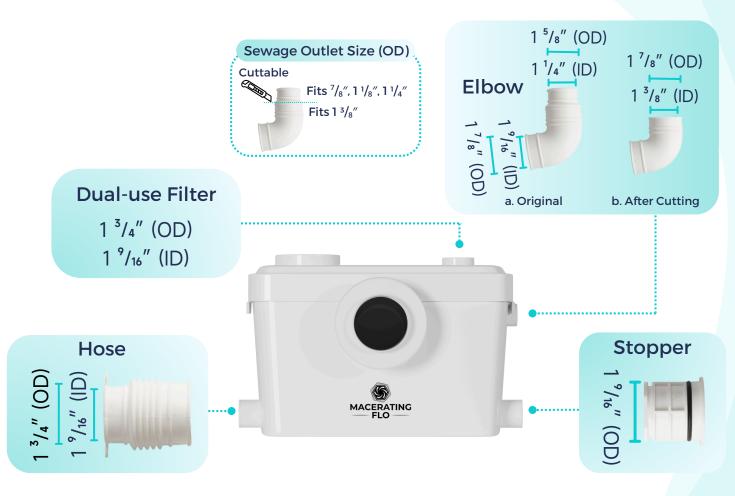

EXTENSION PIPES:

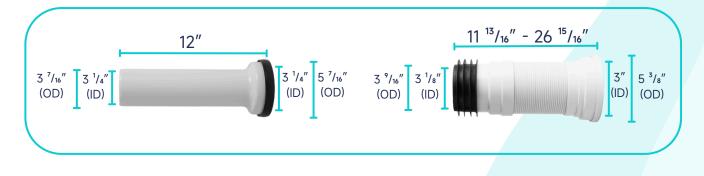

(+1) 626-670-9903



WATER TANK CONNECTION KIT:



(+1) 626-670-9903