

MF600P01

Macerator Pump



FEATURES :

- 30 feet Max. Vertical Discharge
- 260 feet Max. Horizontal Discharge
- 3 Versatile Water Inlets
- 1 ½" Dual Use Vent Pipe
- Sewage Outlet With Built-in Check Valve

TECHNICAL SPECIFICATIONS :

- **Enclosure Class:** IP 55
- **Max. Flow:** 130L/min
- **Start Level:** 65mm
- **Stop Level:** 35mm
- **Cable Length:** 39 ¾"


- **Dimension:** 17 5/16" L * 11 7/16" H * 7 1/16" W
- **Power Factor:** 0.85
- **Insulation Class:** 155(F)
- **Speed:** 3450 RPM
- **Power Consumption:** 600 W
- **Supply Voltage:** 110V-60Hz

Specifications	Details
Material	Stainless Steel, Polypropylene
Color	White
Net Weight	14.3 LB
Gross Weight	16 LB

PACKAGE INCLUDED :



Pump

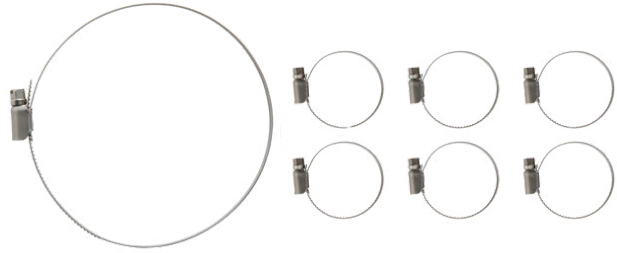

Clamps



Drain Pipe Elbow



Floor Mounting Kit





Stoppers



Inlet Pipe Hoses

DIMENSIONAL DIAGRAM :

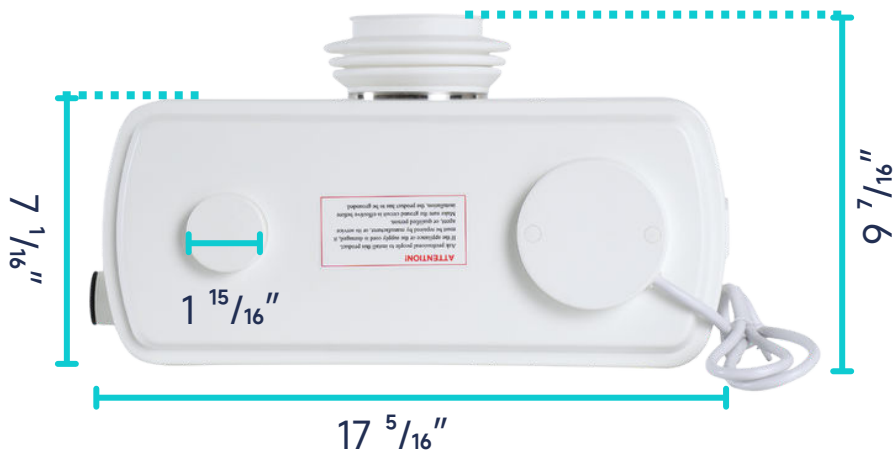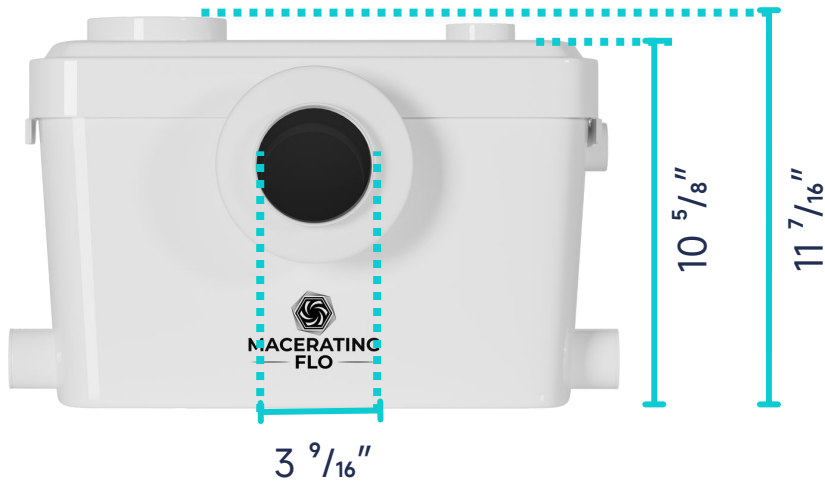



**MACERATING
FLO**

Innovation For A Better Flow

DIMENSIONAL DIAGRAM :

Sewage Outlet Size (OD)

Cuttable



Fits $\frac{7}{8}$ ", $1\frac{1}{8}$ ", $1\frac{1}{4}$ "

Fits $1\frac{3}{8}$ "

Dual-use Filter


$1\frac{3}{4}$ " (OD)

$1\frac{9}{16}$ " (ID)

Hose

$1\frac{3}{4}$ " (OD)

$1\frac{9}{16}$ " (ID)

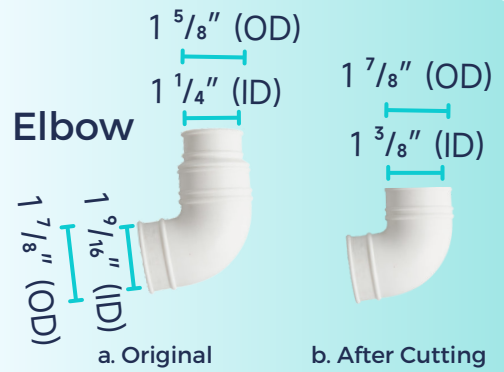

Stopper

$1\frac{9}{16}$ " (OD)

